





Ea

Termostat

EA-T3X_v2

KRATAK PREGLED

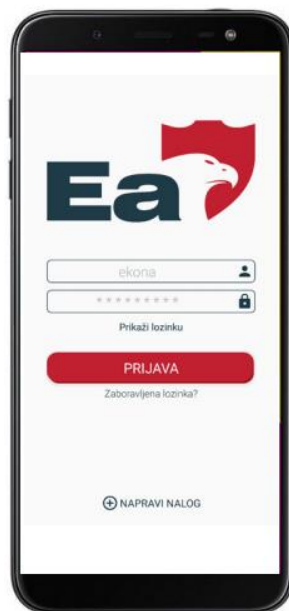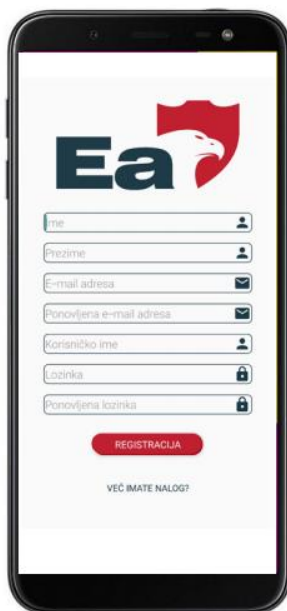

- Specifikacije uređaja
- Pregled uređaja
- Postavke uređaja
- Mobilna aplikacija i konekcija
- Zaključak
- Diskusija



Specifikacije uređaja


Termostat

| | |
|---------------------------------|-----------------------|
| Napajanje | 3 V DC, 2 AA baterije |
| Postavljanje | Zid ili prenosno |
| RF komunikacija | *CS, FEC |
| Ručno upravljanje | Da |
| Zaštita od smrzavanja | Da |
| Osetljivost | 0.5 °C |
| Podešavanje histereze | 0.2 °C – 5 °C |
| Podešavanje temperature | 5 °C – 35 °C |
| Merenje temperature | 5 °C – 40 °C |
| Kalibracija senzora temperature | -5 °C – 5°C |
| Dimenzije | 86x86x29 mm |



Prijemnik

| | |
|------------------|-------------------|
| Napajanje | 230 V AC |
| Prekidačka snaga | 2000 W |
| Izlazi | NO, NC, COM, L, N |
| Frekvencija | 868 MHz |
| Dimenzije | 120x90x25 mm |



Hub

| | |
|---------------------|------------------|
| Napajanje | 5V DC, microUsb |
| Frekvencija | 433 MHz i 2.4GHz |
| WiFi | 2.4 GHz |
| Enkripcija podataka | TLS (SSL) |
| Prečnik | 100 mm |
| Visina | 25 mm |



Mobilna aplikacija

| | |
|--------------------------|------------------------------|
| Sedmodnevni program | Da |
| Upravljanje termostatom | Da |
| Platforma | Android 5.0 / iOS 5 ili više |
| Preuzimanje i ažuriranje | Besplatno |





Pregled uređaja

- Kontrolna dugmad
- Displej
- Pokretanje uređaja
- Postavljanje temperature
- Postavke uređaja



Postavke uređaja

- Podešavanje sata
- Ručni mod
- Programski mod



Postavke uređaja

- Bluetooth dodavanje
- Smart Pairing
- Fabrička podešavanja

Mobilna aplikacija i konekcija (1)





Osnovne opcije:

- Podešavanja
- Dodavanje uređaja
- Dijeljenje uređaja
- Promjena naziva uređaja
- Brisanje uređaja

Mobilna aplikacija i konekcija (2)



STATUS UREĐAJA:

- Osnovna stanja i informacije
- Modovi operacija:
 - GRIJANJE 
 - HLAĐENJE 


Mobilna aplikacija i konekcija (3)



POSTAVKE UREĐAJA:

- Sedmodnevni program
- Zaključavanje
- Termostat
- Verzije uređaja
- Histereza
- Kalibracija senzora
- Antifrost temperatura
- Detekcija otvorenog prozora
- Način rada
- Noćna
- Dnevna
- Adaptivni program

Mobilna aplikacija i konekcija (4)

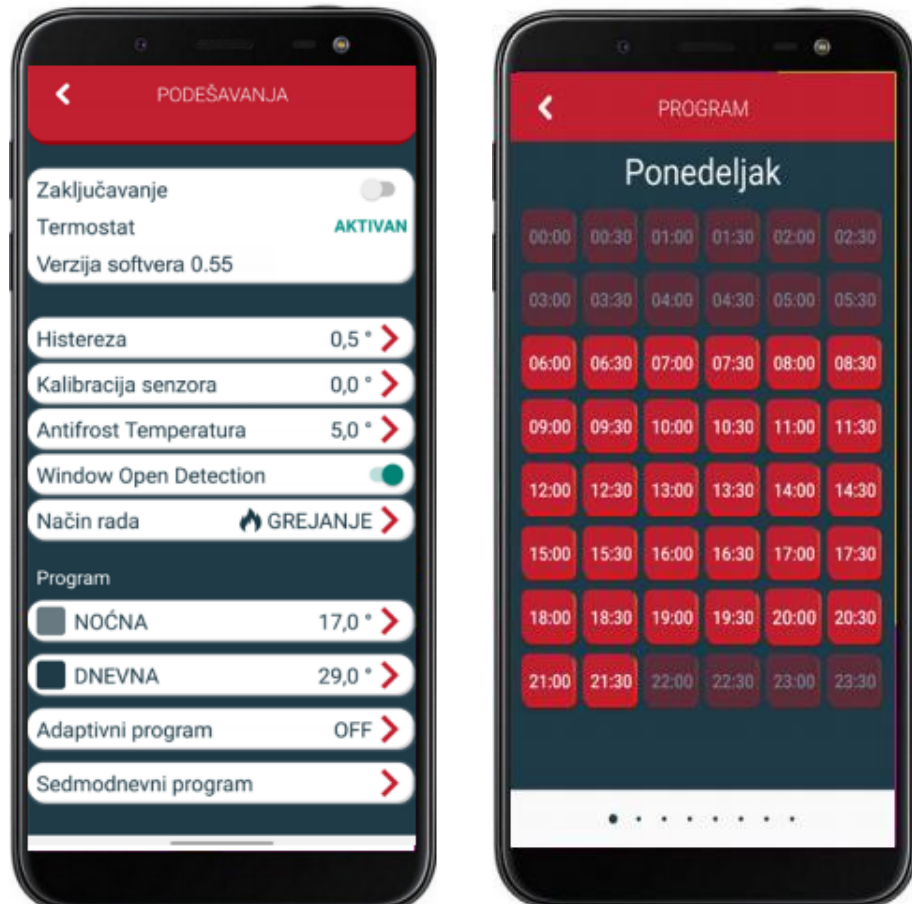

Sedmodnevni program:

- DNEVNA: 7-35
- NOĆNA: 7-35